

For Health Hazard and Continuous Pressure Applications

Water Specialties Company
Backflow Preventer.com

WATTS®
REGULATOR

Series 008PCQT

Health Hazard, Anti-Siphon, Spill-Resistant Backflow Preventer

Sizes: $\frac{3}{8}$ ", $\frac{1}{2}$ ", $\frac{3}{4}$ " and 1" (10, 15, 20, 25mm)

Series 008PCQT is designed for indoor point-of-use applications to prevent backsiphonage of contaminated water back into the potable water supply. Separation of the water supply from the air inlet is accomplished by means of a diaphragm seal. This feature protects against any spillage during start-up or operation.

Features


- Standardly supplied with internal polymer coating
- Standardly supplied with Tee handles
- Available less Tee handle with stem wrench flats. For use where space is limited
- Available in left-handed or right-handed outlet
- Spill-resistant design for indoor use
- Affordable design
- Modular cartridge for ease of service
- Vent uses an O-ring for reliable operation
- Bronze body for durability
- Compact space saving design
- Satin chrome finish available
- Available with strainer

Installation

The 008PCQT is designed to be installed at the point of use. When factory installed deck/machine mounted on machines or equipment, the critical level of the 008PCQT shall be not less than 1" (25mm) above the flood rim. If field applied for general plumbing applications, the critical level of the 008PCQT shall be a minimum of 6" (150mm) above the flood rim.


Specifications

A spill-resistant vacuum breaker (SVB) shall be installed, in accordance with the manufacturer's instructions, as noted on the plans. The valve shall consist of a one-piece modular check and float assembly made of engineered thermoplastic and housed in a bronze body. Springs shall be stainless steel. The valve shall be constructed with a molded diaphragm separating the air inlet from the potable water supply to prevent spillage. The valve shall be a Watts Series 008PCQT.

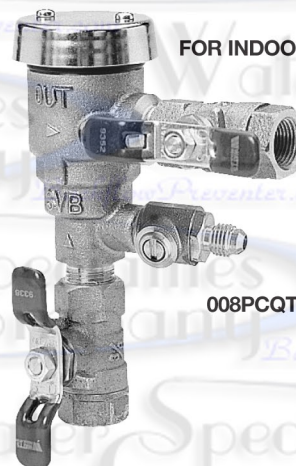


FOR INDOOR USE!


008PCQT




008PCQT-L (Left Handed)



008PCQT (Right Handed)

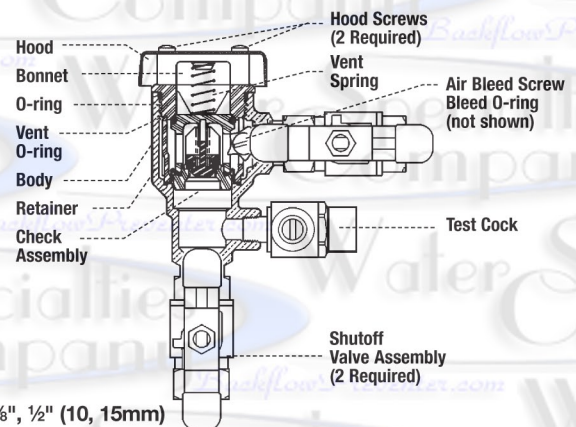

Size: $\frac{3}{8}$ ", $\frac{1}{2}$ " (10, 15mm)

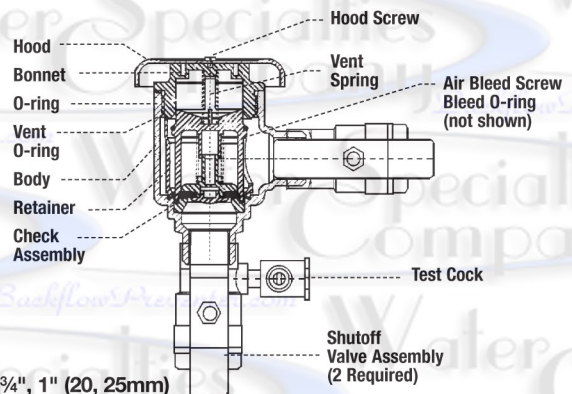

Size: $\frac{3}{4}$ ", 1" (20, 25mm)

Materials

Springs:	Stainless steel
Bonnet:	PPO
Vent Disc:	EPDM
Disc Holder:	PPO
Check Disc:	Silicone rubber
Body:	Bronze

Pressure – Temperature

Temperature Range: 33°F – 180°F (0.5°C – 83°C)
Maximum Working Pressure: 150psi (10.3 bar)



End Connections

Female NPT - Ball Valve shutoffs

Capacity

As compiled from documented Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California lab tests.

*Typical maximum system flow rate (7.5 feet/sec.)

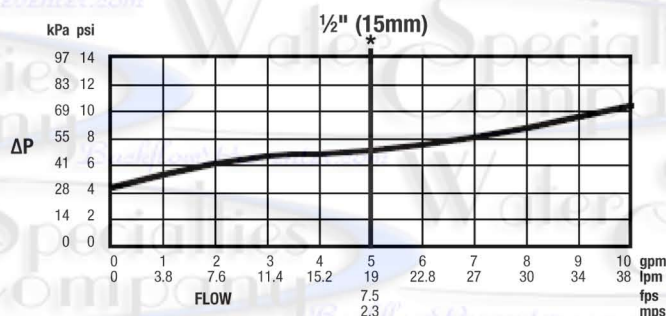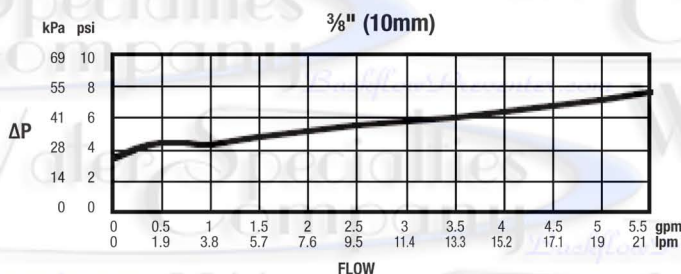


Meets requirements of IAPMO.


Approvals




Listed by IAPMO, Approved by the Foundation for Cross-Connection Control & Hydraulic Research at USC.

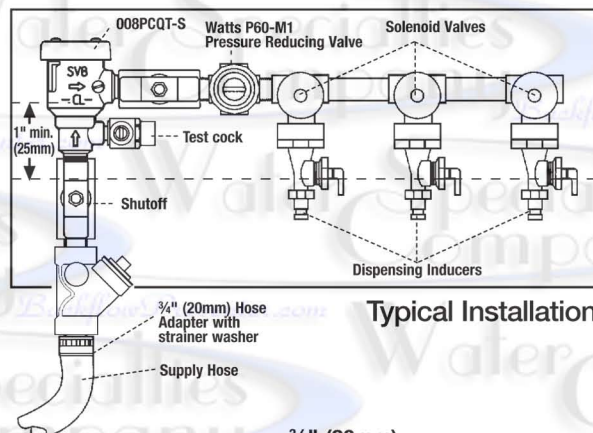

Typical Installation

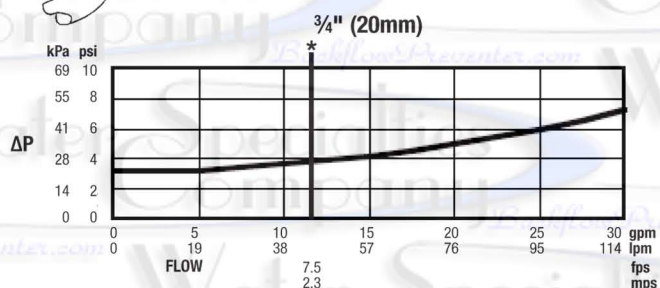

Dimensions — Weights

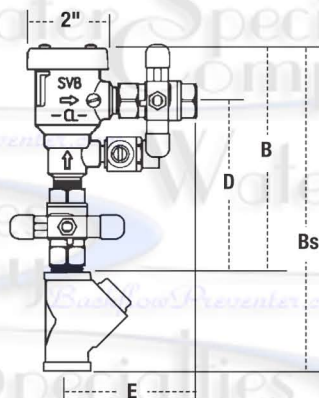

Note: A strainer is recommended to be installed ahead of the backflow preventer to prevent the fouling of the check assembly and resulting spillage from the valve during repressurization. Do not install in concealed locations or areas where water leakage due to normal wear of the internal parts can cause damage.

008PCQT

SIZE (DN)		DIMENSIONS				WEIGHT	
		B		D		E	
in.	mm	in.	mm	in.	mm	in.	mm
3/8	10	5 1/2	140	3 15/16	100	3 3/8	79
1/2	15	5 3/4	146	4 3/16	106	3 3/8	86
3/4	20	7	178	4 5/8	117	4 1/2	114
1	25	7 1/2	191	5 1/8	130	4 7/8	124

008PCQT-S

		Bs					
in.	mm	in.	mm	in.	mm	lbs.	kgs.
3/8	10	7 7/8	200	3 15/16	100	3 3/8	79
1/2	15	8 1/2	216	4 3/16	106	3 3/8	86
3/4	20	10 1/4	260	4 5/8	117	4 1/2	114
1	25	11 3/16	284	5 1/8	130	4 7/8	124

WATTS®

A Watts Water Technologies Company



**ISO 9001-2008
CERTIFIED**

USA: No. Andover, MA • Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com
Canada: Burlington, ON • Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.wattscanada.ca