

SPECIFICATION SUBMITTAL SHEET



(with OS&Y gates)



(with BGVIC valves)

FEATURES

Sizes:	<input type="checkbox"/> 2 1/2"	<input type="checkbox"/> 3"	<input type="checkbox"/> 4"	<input type="checkbox"/> 6"	<input type="checkbox"/> 8"	<input type="checkbox"/> 10"
Maximum working water pressure	175 PSI					
Maximum working water temperature	140°F					
Hydrostatic test pressure	350 PSI					
End connections (Grooved for steel pipe)	AWWA C606					
(Flanged)	ANSI B16.1					
	Class 125					

*2 1/2 & 3" sizes use 4" body & reducer coupling

OPTIONS (Suffixes can be combined)

- ☐ - with flanged end OS & Y gate valves (standard)
- ☐ L - less shut-off valves (grooved body connections)
- ☐ LM - less water meter
- ☐ - with remote reading meter
- ☐ - with gpm meter (standard)
- ☐ - with cu ft/min meter
- ☐ G - with grooved end OS&Y gate valves
- ☐ FG - with flanged inlet gate connection and grooved outlet gate connection
- ☐ MS - with Integral Relief Valve Monitor Switch
- ☐ BGVIC - with grooved end butterfly valves
- ☐ PI - with Post Indicator Gate Valves

ACCESSORIES

- ☐ Air gap (Model AG)
- ☐ Repair kit (rubber only)
- ☐ Thermal expansion tank (Model XT)
- ☐ OS & Y Gate valve tamper switch (OSY-40)
- ☐ QT-SET Quick Test Fitting Set
- ☐ Test Cock Lock (Model TCL24)

DIMENSIONS & WEIGHTS (do not include pkg.)

MODEL 375ADA SIZE	WEIGHT									
	WITHOUT GATES		WITH OS&Y GATES (GXG)		WITH OS&Y GATES (GXG)		WITH BUTTERFLY VALVES (GXG)			
	in.	mm	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg
2 1/2	65		112	50.8	214	97	206	93.5	131	59.4
3	80		111	50	231	104.8	221	100.3	132	60
4	100		98	45	252	114	226	103	130	59
6	150		151	69	387	176	357	162	203	92
8	200		321	146	797	362	773	351	429	195
10	250		374	170	1059	480	937	425	546	248

MODEL 375ADA SIZE	DIMENSION (approximate)																				
	A		A WITH BUTTERFLY VALVES		B LESS GATE VALVES		C		D		E OS&Y OPEN		E OS&Y CLOSED		E WITH BUTTERFLY VALVES		F		H		
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	
2 1/2	65	35 1/8	892	32 1/8	816	20 1/8	511	4 1/2	114	9	229	16 3/8	416	13 7/8	352	8	203	11	279	7 1/4	184
3	80	36 1/8	918	33	838	20 1/8	511	4 1/2	114	9	229	18 7/8	479	15 5/8	397	8	203	11	279	7 1/4	184
4	100	38 1/4	972	33 1/4	845	19 7/8	505	4 1/2	114	9	229	22 3/4	578	18 1/4	464	9 1/8	232	11	279	7 1/4	184
6	150	47 1/4	1200	40 1/4	1022	25 7/8	657	5 1/2	140	10 1/2	267	30 1/8	765	23 3/4	603	10 1/8	257	12 3/8	314	9 1/4	235
8	200	62	1575	55	1397	38 1/2	978	10	254	12	305	37 3/4	959	29 1/4	743	11 15/16	303	15 3/8	391	13 7/8	333
10	250	64 5/8	1642	58 1/2	1485	38 1/2	978	10	254	12	305	45 3/4	1162	35 3/8	899	13 5/16	338	15 3/8	391	16 7/16	418

APPLICATION

Designed for installation on potable water lines in fire protection systems to protect against both backsiphonage and backpressure of contaminated water into the potable water supply. The Model 375ADA shall provide protection where a potential health hazard exists. Incorporates metered by-pass to detect leaks and unauthorized water use.


STANDARDS COMPLIANCE

- ASSE® Listed 1047 (2 1/2" - 8")
- CSA® Certified (2-1/2" - 8")
- UL® Classified
- C-UL® Classified
- FM® Approved
- Approved by the Foundation for Cross Connection Control and Hydraulic Research at the University of Southern California.
- NYC MEA 104-05-M


MATERIALS

Main valve body	Ductile Iron ASTM A 536 Grade 4
Access covers	Ductile Iron ASTM A 536 Grade 4
Coatings	FDA Approved fusion epoxy finish
Internals	Stainless steel, 300 Series
	NORYL™, NSF Listed
Fasteners & Springs	Stainless Steel, 300 Series
Elastomers	EPDM (FDA approved)
	Buna Nitrile (FDA approved)
Polymers	NORYL™, NSF Listed
Sensing line	Stainless steel, braided hose

MODEL
375ADA with
standard OS&Y

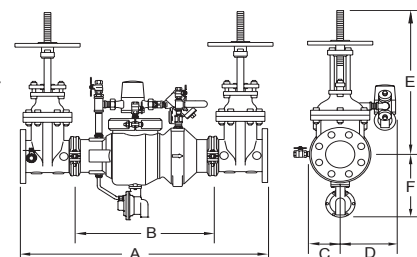

MODEL
375ADA with
BGVIC option

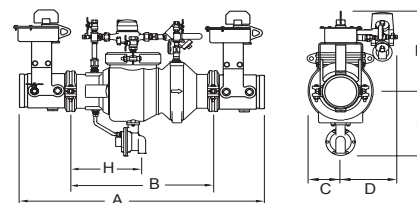


Attention: Model 375ADA (grooved body) and Model 375DA (flange body) have different lay lengths.


Relief Valve
discharge port:
2 1/2" - 6" - 2.75 sq. in.
8" - 10" - 3.69 sq. in.

FLOW CHARACTERISTICS


MODEL 375ADA 2-1/2" - 3" (STANDARD AND METRIC)

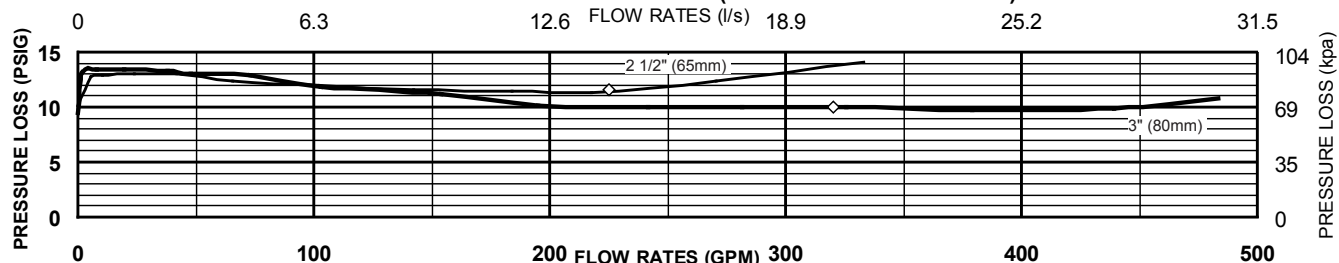

MODEL 375ADA 4" & 6" (STANDARD & METRIC)

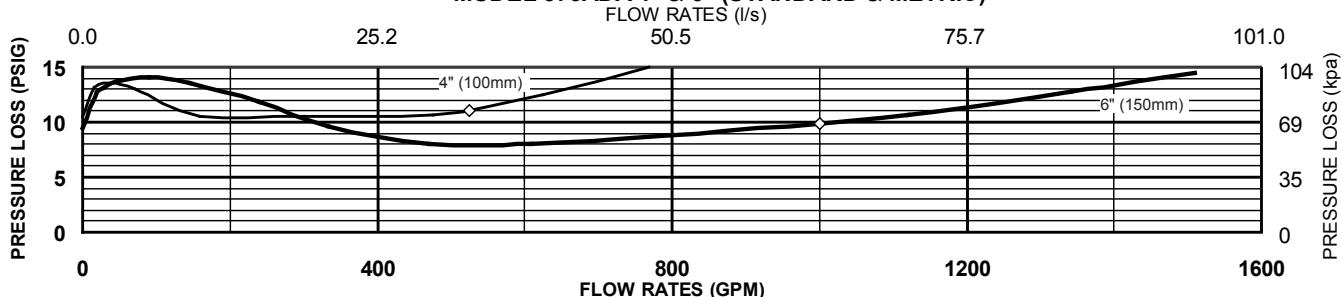

MODEL 375ADA 8" & 10" (STANDARD & METRIC)

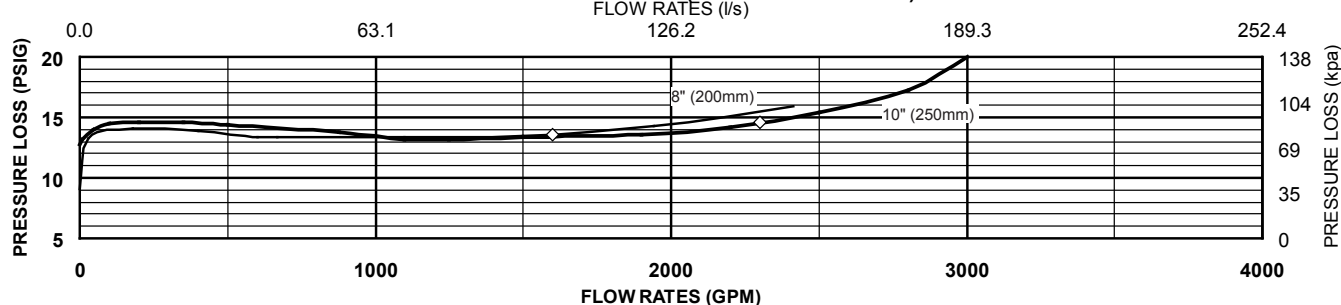


◇ Rated Flow (established by approval agencies)


TYPICAL INSTALLATION

Local codes shall govern installation requirements. To be installed in accordance with the manufacturer's instructions and the latest edition of the Uniform Plumbing Code. Unless otherwise specified, the assembly shall be mounted at a minimum of 12" (305mm) and a maximum of 30" (762mm) above adequate drains with sufficient side clearance for testing and maintenance. The installation shall be made so that no part of the unit can be submerged.

Capacity thru Schedule 40 Pipe (GPM)				
Pipe size	5 ft/sec	7.5 ft/sec	10 ft/sec	15 ft/sec
2 1/2"	75	112	149	224
3"	115	173	230	346
4"	198	298	397	595
6"	450	675	900	1351
8"	780	1169	1559	2339
10"	1229	1843	2458	3687
12"	1763	2644	3525	5288

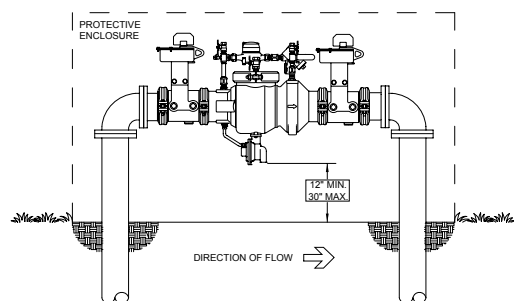

OUTDOOR INSTALLATION (MODEL 375ADA with BGVIC option)



INDOOR INSTALLATION (MODEL 375ADA with G option)

SPECIFICATIONS

The Reduced Pressure Detector Backflow Prevention Assembly shall be ASSE® Listed 1047, and supplied with full port OS & Y gate valves. The main body and access cover shall be epoxy coated ductile iron (ASTM A 536 Grade 4), the seat ring and check valve shall be NORYL™, the stem shall be stainless steel (ASTM A 276) and the seat disc elastomers shall be EPDM. The checks and the relief valve shall be accessible for maintenance without removing the device from the line. The Reduced Pressure Detector Backflow Prevention Assembly shall be a WILKINS Model 375ADA.

WILKINS a Zurn company, 1747 Commerce Way, Paso Robles, CA 93446 Phone: 805/238-7100 Fax: 805/238-5766

IN CANADA: ZURN INDUSTRIES LIMITED, 3544 Nashua Dr., Mississauga, Ontario L4V 1L2 Phone: 905/405-8272 Fax: 905/405-1292

Product Support Help Line: 1-877-BACKFLOW (1-877-222-5356) • Website: <http://www.zurn.com>